

UNDERFLOOR HEATING MATS

Description

Our heating mats have an adhesive back for an easy mounting. The heating mat is normally placed in the adhesive layer of a tiled floor. By making an incision between the cables, you can lay the mat back in the opposite direction. This procedure can be repeated until the whole floor area is covered. The heating mat has to be controlled by a thermostat.


Technical data

Specific charge 150 W/m

Width 0.5 m

Heating cable 3.6 mm, Synthetic outer sheet

Connection Power cable 2500mm

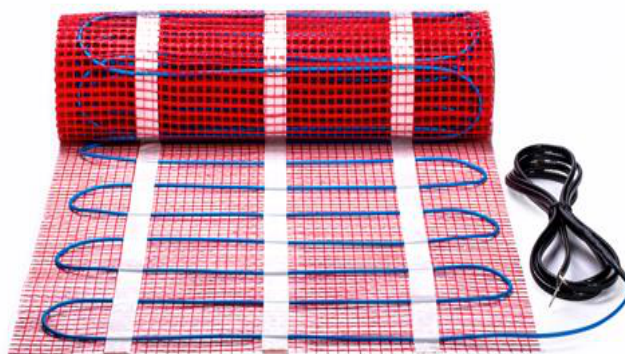

Standard assortment

Power W	Voltage V	Dimension m	Area m ²	Article no
75	230	0.5 x 1	0.5	GM.01.007.00
150	230	0.5 x 2	1.0	GM.01.015.01
225	230	0.5 x 3	1.5	GM.01.022.01
300	230	0.5 x 4	2.0	GM.01.030.02
375	230	0.5 x 5	2.5	GM.01.037.02
450	230	0.5 x 6	3.0	GM.01.045.03
525	230	0.5 x 7	3.5	GM.01.052.03
600	230	0.5 x 8	4.0	GM.01.060.04

Power W	Voltage V	Dimension m	Area m ²	Article no
675	230	0.5 x 9	4.5	GM.01.067.04
750	230	0.5 x 10	5.0	GM.01.075.05
900	230	0.5 x 12	6.0	GM.01.090.06
1050	230	0.5 x 14	7.0	GM.01.105.07
1200	230	0.5 x 16	8.0	GM.01.120.08
1350	230	0.5 x 18	9.0	GM.01.135.09
1500	230	0.5 x 20	10.0	GM.01.150.10
1800	230	0.5 x 24	12.0	GM.01.180.12

Benefits & Applications

BENEFITS

- Easy to install
- Small mat thickness
- Quick heating

FIELDS OF APPLICATION

- Bathrooms
- Kitchens
- Hotel rooms and living rooms
- Other inside applications

